

# GP250R

## BOLLARDS AND HEIGHT RESTRICTORS

Revision: 17 December 2024 2:07 PM  
Boplan reference: GP250R...

### PRODUCT SPECIFICATIONS

APPLICATION	
Protection	Utilizing Boplan's innovative tube-in-tube system, the GP250R is engineered as a robust height restriction solution with an impressive impact resistance up to 10 kJ. It serves as a protection for gates, canopies, bridges, loading docks, and industrial doorways against collisions with high vehicles like elevated work platforms, trucks, and buses. Enhanced by a solid base defender, it effectively absorbs collision forces while ensuring safe distances from pallets. Ensuring protection indoors and outdoors in industrial environments.
Impact performance at 90°	POST: 10 200 Joule (Eq. to 3,8 ton - 8,3 km/h)
MATERIAL	
Posts and rails	Extrilene® - UV resistant - Fire class E <sup>+</sup> - Non conductive - Impervious to most chemicals <sup>**</sup>
Caps	Sustainable elastomer
STANDARD COLOUR	
Posts	Yellow RAL 1003
Top rail	Yellow RAL 1003
OPTIONAL	
Sign Mark 200	Sign board used to display important messages. It is designed for a perfect fit around the Top Rail and signs can easily be replaced with just a click.
BASEPLATE	
	Zinc Coated Steel
Material	Steel 37
Coating	Electroplated + Laquered
Colour	Mat black

<sup>+</sup>Classification according to EN 13501-1:2007 +A1:2009 - Fire classification of construction products and building elements.

<sup>\*\*</sup>Ask your local sales office for resistance to specific chemicals.

		FIXATIONS	
		ZC (Zinc coated)	SS (Stainless steel)
STANDARD	Concrete screw	 Ø17mm x 130mm 	Not available
	Wedge anchor	 Ø18mm (M12) x 130mm 	Not available
ALTERNATIVE	Anchor rod (Chemical)	 M16 x 120mm + chemical resin	Not available







The anchors specified in this document are metric. Imperial anchors are available on demand.

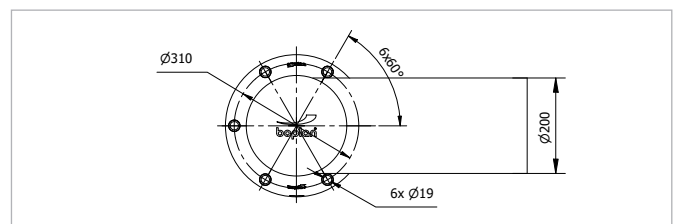
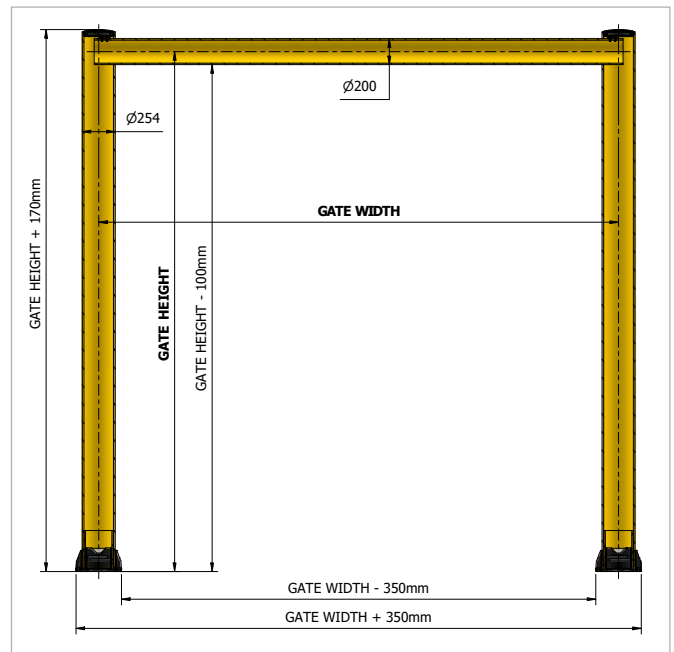


## FEATURES AND FUNCTIONALITY - GP250R

SIZE	
Inner Height	min. 1900 - max. 5900 mm
Inner Width	min. 1546 - max. 5746 mm
Vertical frame post	Outer tube: Ø254 mm
Horizontal top rail	Ø200 mm
Baseplate	Ø350 mm (15 mm thick)
Base Defender	Top: Ø250 mm Base: Ø354 mm Height: 150 mm

REQUIREMENTS	
Concrete quality	minimum C25/30
Concrete floor plate thickness (mm)	minimum 150 mm
Concrete slab dimension around posts (mm)	1000 (h) x 1000 (w) x 700 (d)
Operational temperature	-10°C up to +40°C
Water and humidity	<b>Zinc coated:</b> outdoor use in most environments.
When higher than 4 meters	(wall) connection needed

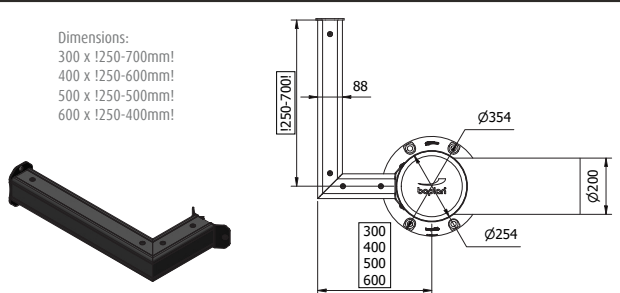

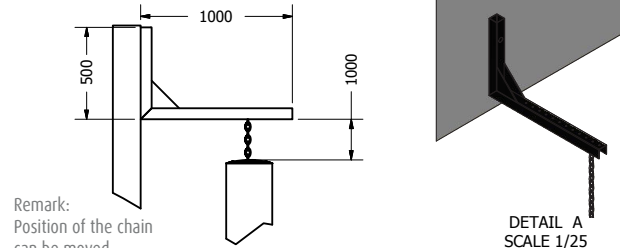
 <b>IMPACT LABEL SAFETY GATES</b>			
<b>GOAL POST 250R</b>			
<b>BOPLAN IMPACT CATEGORY</b>	<b>RATING</b>	<b>90°</b>	
<b>X</b>	50 kJ 40 kJ	 <b>10 200 Joule</b>	
<b>T</b>	30 kJ 25 kJ 20 kJ		
<b>F</b>	17kJ		
<b>R</b>	15 kJ 12 kJ 10 kJ		
<b>B</b>	7.5kJ 5.0 kJ 2.5 kJ 0.5 kJ		
<b>L</b>			
<b>*Dynamic impact result: 10 200 Joule</b>			
<b>IMPACT TEST RESULTS AT 90°</b> Product: GP250R1-4000-S200YEZ - 4000 mm / 13 ft Deflection Post (α) At maximum impact energy			
 $\alpha = 8.6^\circ$			
<b>TEST CONDITIONS FOLLOWING PAS13: 2017</b> TEMPERATURE: 20°C / 68°F IMPACT ON MIDDLE OF POST IMPACT HEIGHT: 300 mm / 11 Inch TEST FLOOR: CONCRETE SLAB C25/30 - 150 mm / 6 Inch			<b>BOPLAN TEST CENTRE</b> Muizelstraat 12 8560 Moorsele Belgium
<b>TEST VEHICLE:</b> TYPE: BOPLAN IMPACT TEST VEHICLE WEIGHT: 3775 Kg / 8322.45 lbs SIZE (L x W x h): 3100 x 1100 x 1150 mm / 122 x 43.3 x 45.3 Inch CONTACT AREA, STEEL BUMPER WIDTH: 1000 mm / 39.4 Inch 			
<b>* IMPACT VALUE ACCOUNTING FOR BARRIER DEFORMATION DURING IMPACT</b>		<b>IL-GP250R-20241106</b>	



## REFERENCE LIST - GP250R

POSTS		TOP RAIL	
GP250R Posts - 2000-3000mm Yellow ZC	GP250R1-3000-S200YEZ	GP250R Top rail - 1800-2500mm Yellow	GP250R1-2500-TR00YE
GP250R Posts - 3100-4000mm Yellow ZC	GP250R1-4000-S200YEZ	GP250R Top rail - 2600-4000mm Yellow	GP250R1-4000-TR00YE
GP250R Posts - 4100-6000 Yellow ZC (Wall connection mandatory but NOT included)	GP250R1-6000-S88YEZ	GP250R Top rail - L 4100-6000mm Yellow Reinforced	GP250R1-6000-TRRBYE

SUPPORT			
Wall connection plastic system Black  (Ref. = 1 piece)	GP250R-0300-0700-WBL GP250R-0400-0600-WBL GP250R-0500-0500-WBL GP250R-0600-0400-WBL	<p>Dimensions: 300 x 1250-700mm! 400 x 1250-600mm! 500 x 1250-500mm! 600 x 1250-400mm!</p> 	
Wall connection - for top rail metal with chain  (Ref. = 1 piece)	GP0099-0002-WCP0BL	 <p>Remark: Position of the chain can be moved.</p> <p>DETAIL A SCALE 1/25</p>	